


Schnellkupplung, EU-Standard, 90°,
mit/ohne Ventil

Quick-release Coupling, EU-Standard, 90°,
with/without Valve

S3305/ . . .

Mat.: 2.0401 (Messing)

Mat.: 2.0401 (Brass)

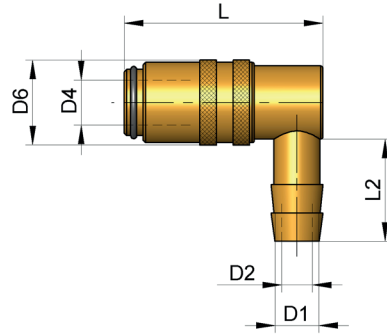

L	L2	D1	D2	D6	D4	Best. Nr. / Order No. ◊W-	Best. Nr. / Order No. ↔
41	22	9	6	18	9	S3305/ 9	S3305/ 9 OV
51	28,5	13	9	23	13	S3305/ 13	S3305/ 13 OV
78	32	19	13	32	19	S3305/ 19	S3305/ 19 OV