


**Thermoelement,
Bajonettverschluss**

**Thermocouple,
Connection with Bayonet**

S5406/ . . .

 = Fe-CuNi, Type J


max. 400 °C

ohne Stecker

without plug

- Schutzrohr aus Edelstahl 1.4541.
- Knickschutzfeder aus Edelstahl.
- Anschlussleitung: flexibel, glasseidenisoliert, stahldrahtumflochten.

- Sheath: stainless-steel 1.4541.
- Spring: stainless-steel.
- Extension cable fibreglass insulated, armouring galvanized steel wires.

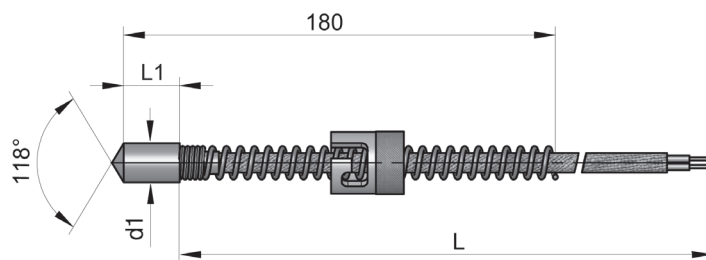

L1	d1	L	Best. Nr. / Order No.
10	6	2000	S5406/ 6x2000
4	8	2000	S5406/ 8x2000
4	8	3000	S5406/ 8x3000

Weitere Ausführungen auf Anfrage.

Other designs on request.